


# VEHICLE TESTING TECHNOLOGY SIDE-SLIP TESTER

**C\_MINC 4.0**  
VP 220016

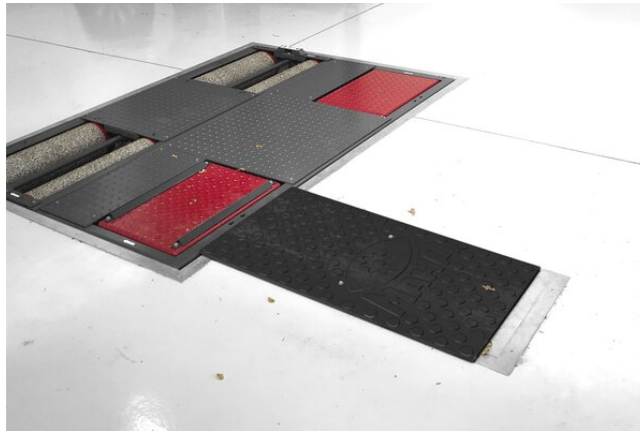

**C\_MINC 4.0**  
VP 220016

The side-slip tester MINC-PROFI ensures that the axle geometry is inspected within seconds once the test vehicle passes over it as well as a fully automatic evaluation of the deviation in m/km. The display of the measured values is via the web client of the CONNECT series.

## PRODUCT DETAILS/ACCESSORIES

### Description:

Side-slip tester, checks the axle geometry within seconds while passed over by vehicle up to 4 t axle load

Specially suitable for car reception, diagnostic and PTI test lanes for heavy vehicles such as SUVs, off-roadorsor vans and higher vehicle throughput

Fully automatic evaluation of deviation in m/km

In combination with CONNECT Web client:  
Automatic display on respective terminal device

(smart device, PC, ) when vehicle drives onto tester,

including evaluation in m/km

### Design:

- Side-slip tester C\_MINC 4.0
- Self-supporting frame with movable test plate incl. vulcanised rubber pad
- High-quality powder coating: anthracite grey, RAL 7016

### Scope of delivery:

- Side-slip tester C\_MINC 4.0 floor assembly
- Prepared for connection to CONNECT test lane
- Plug-in cable harness with 3 m total length for connection with C\_MBT floor assembly

## TECHNICAL DATA

Axle load	4000 kg
Measurement range	+/- 20 m/km
Test speed	5 - 7 km/h
Floor assembly dimensions (H x W x L)	80 x 1020 x 460 mm

## ACCESSORIES

VZ 935307 Cable harness extension 10 m for C\_MINC series

### SUPPLEMENTARY CHARGES

VT 998265 Transport Werkverkehr -SÜDRadlauftester PKW

VT 998266 Transport Werkverkehr -NORDRadlauftester PKW

VM 995031 Installation costs incl. briefing and calibration MINC up to 4.0 t axle load